

RACER SMART MINI

outdoor lighting



Pole top or side entry luminaires for 48÷60 mm diameter poles
 BODY: painted die-cast aluminum
 DIFFUSER: transparent hardened glass
 POWER SUPPLY: dimmable integrated electronic ballasts with optional thermal protection and CLO function
 OTHER: tool-free access to the geartray, separate optical and electronics compartments, wireless control via the ZigBee PRO system, operating temperature range: -40 to +35°C

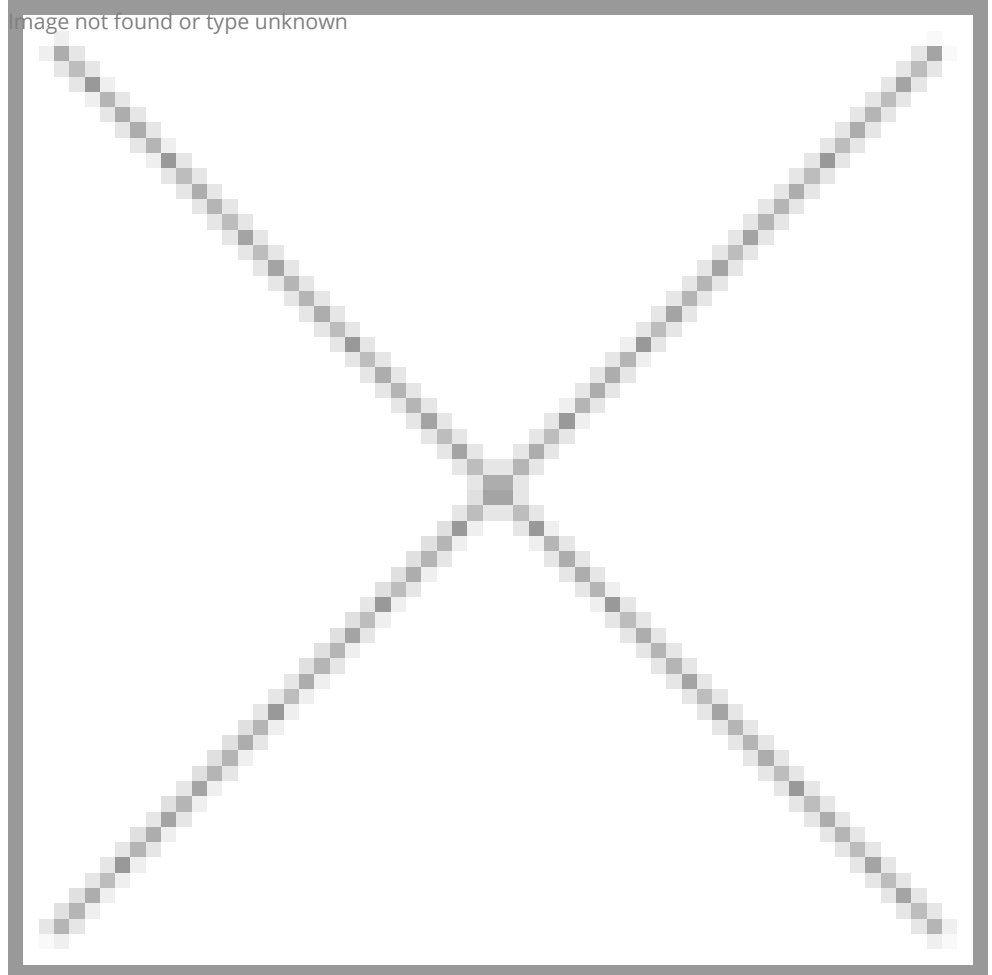


Image not found or type unknown

Image not found or type unknown

Hardened glass diffuser, transparent, version with wireless ZigBee PRO control

5147110	Racer Smart Mini 826	LED 4000K	3400 lm	230V AC	40W	13.00
5147120	Racer Smart Mini 826	LED 4000K	5400 lm	230V AC	55W	13.00
5147130	Racer Smart Mini 826	LED 4000K	6700 lm	230V AC	75W	13.00
5147140	Racer Smart Mini 826	LED 4000K	9300 lm	230V AC	100W	14.00

5147150	Racer Smart Mini 826	LED 4000K	13500 lm	230V AC	143W	15.00
5147310	Racer Smart Mini 826	LED 5700K	3400 lm	230V AC	40W	13.00
5147320	Racer Smart Mini 826	LED 5700K	5400 lm	230V AC	55W	13.00
5147330	Racer Smart Mini 826	LED 5700K	6700 lm	230V AC	75W	13.00
5147340	Racer Smart Mini 826	LED 5700K	9300 lm	230V AC	100W	14.00
5147350	Racer Smart Mini 826	LED 5700K	13500 lm	230V AC	143W	15.00